

ULTRASONIC/VAPOR-SPRAY DEGREASERS




Greco Brothers Ultrasonic Vapor-Spray Degreasers are designed and built to provide years of efficient, reliable service when using chlorinated solvents, n-propyl bromide, or the new HFE and HFC solvent blends. All Greco Brothers solvent vapor degreasers meet recent EPA and NESHAP guidelines for currently accepted degreasing solvents.

The following pages list our standard models. The compartment sizes of our standard models were chosen to accommodate the most common applications we encounter. However, if none of these sizes are appropriate for your application, please contact us. We will be pleased to offer you a custom system that will meet your needs.



Greco Brothers Incorporated

1 Greco Lane
Providence, Rhode Island 02909-2616
401/421-9306 fax: 401/274-8910
www.grecobrothers.com

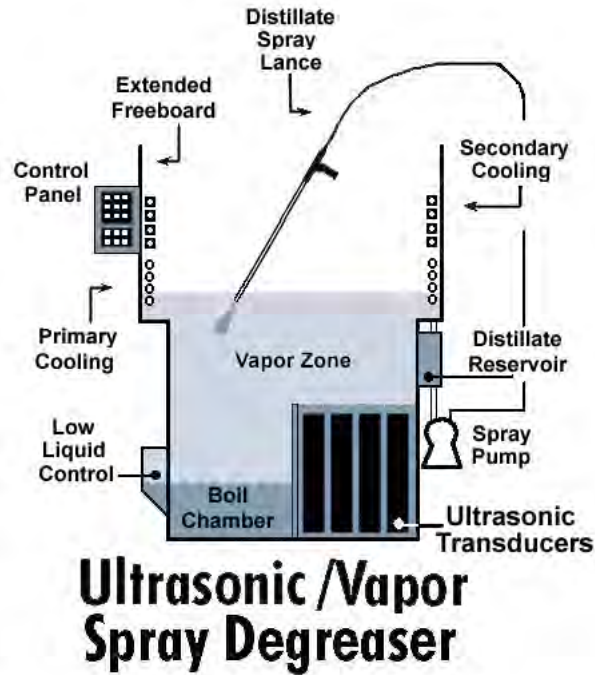

ULTRASONIC/VAPOR SPRAY DEGREASERS

Standard Models*				
Model #	Work Chamber Dimensions	Solvent Capacity	Overall Dimensions•	Power Requirements+
UVD1214	12" x 14" x 12"D	27 Gal	80" x 34" x 60"H	240V/1PH
UVD2016	20" x 16" x 16"D	55 Gal	104" x 34" x 72"H	240V/3PH
UVD2820	28" x 20" x 20"D	90 Gal	118" x 36" x 82"H	240V/3PH

*See below for information regarding custom sizes.

•Overall dimensions include primary and secondary refrigeration systems and may be altered.

+Other voltages available.